


# DATA SHEET

**Model Name : RI 6149 RF SHIELD BOX**

## **Features :**

- Rack Mountable / Table Top
- Rugged Aluminium Welded Box
- Fully Customizable Shielded Enclosure
- User Defined I/O Connector
- Tight Locking and Gasket System
- Copper Beryllium fingers are provided for ensuring Shielding Effectiveness.
- Powered by AC / DC Power Filter Lines.
- Honeycomb Ventilation for Cooling.

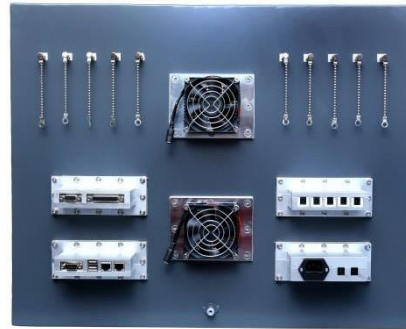

## **Specification:**

- Exterior : 610 mm(W) X 490 mm(H) X 625 mm(D)
- Interior : 560 mm(W) X 440 mm(H) X 575 mm(D)
- Frequency Range : 20 MHz to 6 GHz
- Isolation:  $\geq 125$ dB @ 1GHz  
 $>120$ dB @ 3GHz  
 $>90$  dB @ 6GHz
- Rack Mountable / Table Top / Trolley Based

## **Application**

- Ideal for 802.11a , b, g, n, ac.
- Bluetooth , Wi-Fi , 4G , 5G Device Testing , RFID Device Testing ,
- R & D